PION POWER

Cooling Fan

2 x AC Outputs 300W

ㅋ(⑥기 ㅋㅁ삐ఠ୮



Flashlight Switch

LED Flashlight*2

AC ON/OFF

2 x USB-A 10W

1 x USB-A QC3.0 18W

1 x USB-C 30W

Power Switch ON/OFF

3 x DC Outputs 180W


LED Display

Input AC Adaptor DC 15V, 2A, 30W

IBB, DC OUT O

Provide Enough Power for Your Weekend Getaway

No matter where your outdoor excursions take you, the Pion Power P201's 150W AC output ensures you'll have enough power to keep all your essential devices and equipments running, so you can focus on enjoying your adventure.

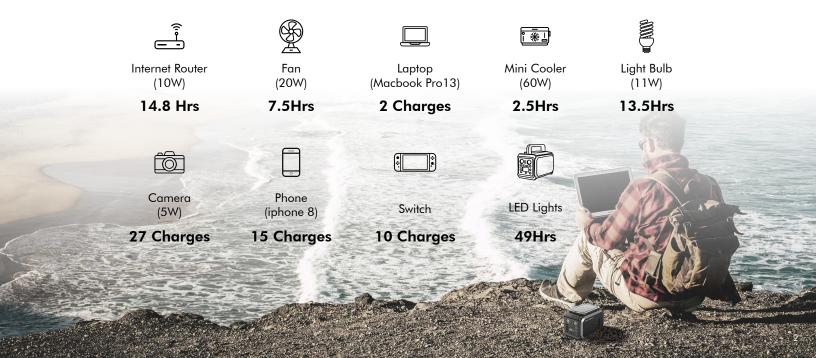

Battery Info			
Capacity:	148Wh, 10Ah/14.8V (Equivalent to 40,000mAh, 3.7V)	Cell Chemistry:	Lithium-ion
Lifecycle:	500 cycles to 80%+ capacity	AC Power:	150W (Surge 300W)
Output			
Inverter Type:	Modified Sine Wave	AC Output:	2 x 110V, 150W (300W Max)
USB-A Output:	2 x 5V, 2.1A (Max)	DC Output:	3 x 12-16.8V, 10A, 180W Max
USB-C Output:	1 x 5V, 2A, 9V/12V/15V, 2A (Max), 30W	Car Output:	1 x 12V, 5A 150W Max
Quick Charge 3.0 Output:	1 x 5V/9V, 2A or 12V, 1.5A, 18W		
LED Light			
Power	3W	Modes	Weak, Strong, SOS
Recharge			
Input Port:	DC 5521	AC Adaptor:	DC 15V, 2A, 30W
Solar Input:	DC 7-24V, 2A, 30W Max		
General			
Dimensions:	6.9 x 4.1 x 4.3 in (17 x 10.5 x 11.5cm)	Weight:	4.0 lbs (1.8 kg)
Operating Temperature:	32°F-104°F (0°C-40°C)	Storage Temperature:	32°F-104°F (0°C-40°C)
Certification:	CE, FCC, ROHS	Product Warranty:	2-year Product Warranty

In The Box

- 1 x P201 Portable Power Station, 1 x AC Adaptor (AC-DC 5521), 1 x Car Charging Cable,
- 1 x Car Cigarette Lighter Adaptor, 1 x User Manual

^{*}If you have any confusion or questions, please don't hesitate to reach out to the Pion Power support team at support@pionpower.ca.

